

14th May 2021

Company Announcement Officer
ASX Limited
Exchange Centre
20 Bridge Street
SYDNEY NSW 2000

Exceptional High-Grade Drill Results from Bowdens Silver

HIGHLIGHTS

Aegean and Northwest High Grade Zones

- High-grade assay results recently returned from BD21003 establishes the Bowdens Silver “Aegean Zone” as a significant target for underground mining scenarios. Intercepts include:
 - 8.0 metres @ 543 g/t silver from 307 metres; including:
 - 3.0 metres @ 1302 g/t silver from 312 metres.
- These latest results including previous results define the Aegean Zone as a high-grade body of silver mineralisation with a strike length of 150 metres, a width of 50 metres and 2 to 8 metres thick.
- The zone remains open to the east (down dip), north and northwest (down plunge).
- The Aegean Zone is located approximately 300 metres to the east of the Northwest High-Grade Zone, where recent drilling has returned similar spectacular results.
- Further drilling is underway to test the relationship and potential connectivity of the Aegean and Northwest High-Grade Zones.

Main Zone

- In addition, drilling results (BD21003) to the north of the Main Zone and close to surface, confirms that the Main Zone remains open to the northwest of the current Ore Reserve and includes:
 - 113.3 metres @ 113 g/t silver equivalent (90g/t silver, 0.29% zinc, 0.29% lead) from 60.7 metres.

Introduction

Silver Mines Limited (ASX:SVL) (“Silver Mines” or “the Company”) is pleased to announce significant drill assay results at the Bowdens Silver Project located near Mudgee in New South Wales.

Diamond drilling has continued to test the potential for underground mining scenarios at the Bowdens Silver Deposit with a focus on the Northwest High-Grade Zone and more recently on the Aegean Zone. The Aegean Zone is a high-grade vein system located beneath the bulk-tonnage Ore Reserve in the Main Zone area of the Bowdens Deposit (refer to Figure 1).

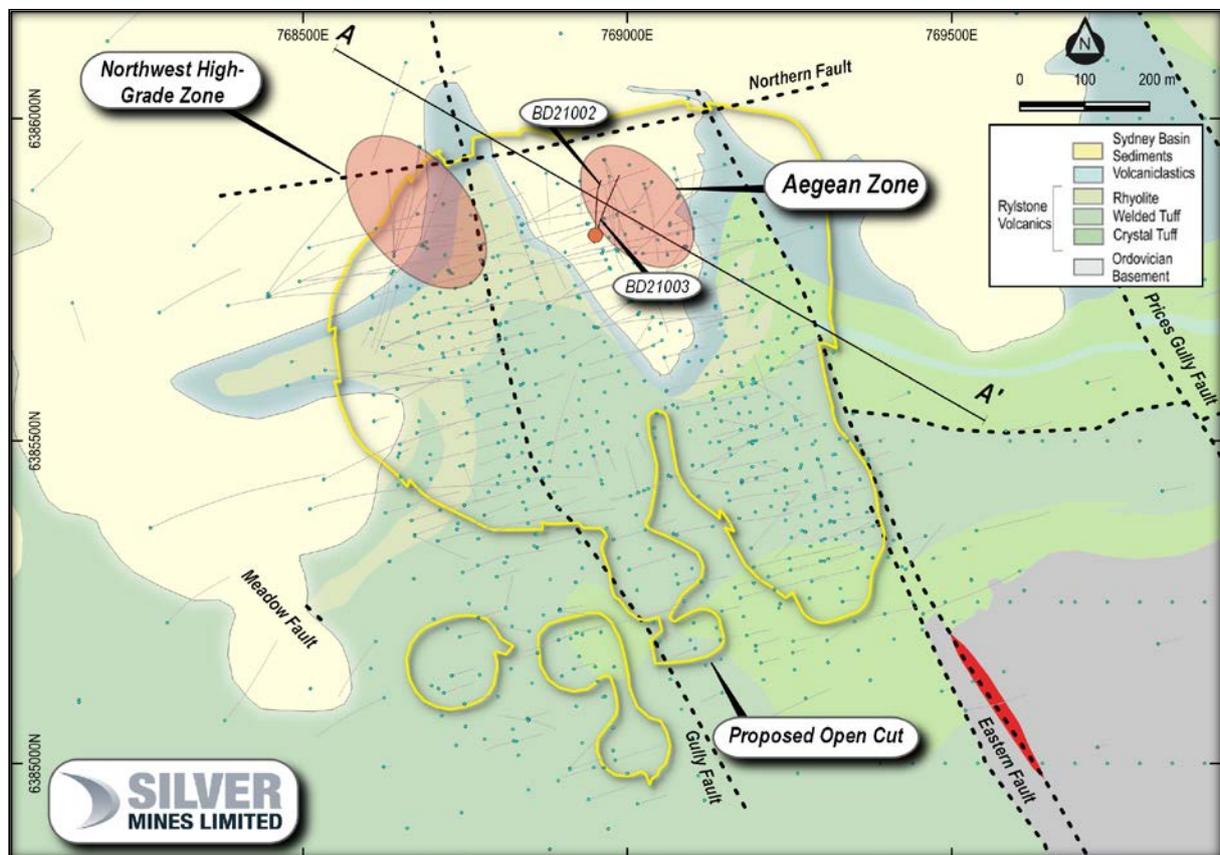


Figure 1. Reported drillhole locations and High-Grade silver targets at the Bowdens Silver Project.

Aegean Zone Results

Results have been received for the second of two drill holes, BD21003, designed to test for extensions to high-grade mineralisation below the Main Zone. This zone is now identified as the Aegean Zone. The Aegean Zone is similar in nature to the Northwest High-Grade Zone with predominantly silver mineralisation (relatively low in zinc and lead) hosted in the base of the welded tuff unit in the Rylstone Volcanics. Mineralisation consists of veined and breccia/fracture filling sulphides, mostly acanthite (silver sulphide).

The zone is sub-horizontal with a steepening of plunge to the north. The body is now defined over 150 metres in strike towards the north-northwest, 50 metres thick and has a thickness of 2 to 8 metres. The zone remains open to the east (down dip) and north-northwest (down plunge). The Aegean Zone mineralisation trend is similar to the Northwest High-Grade Zone, and extends from the base of the designed open pit/bulk tonnage Ore Reserve and plunges to depth towards the northwest.

New results defining the Aegean Zone include a significant intercept of **8.0 metres @ 543g/t silver** from BD21003 (refer to Figure 2). Also received recently is BD21002 from the Aegean Zone which intersected **8.0 metres at 198 g/t silver** from 260 metres and **2.0 metres at 245g/t silver** from 295 metres. Recent results are shown in Table 1.



Figure 2: Coarse acanthite (silver sulphide) and carbonate vein in the Aegean Zone from BD21003 at 313 metres.

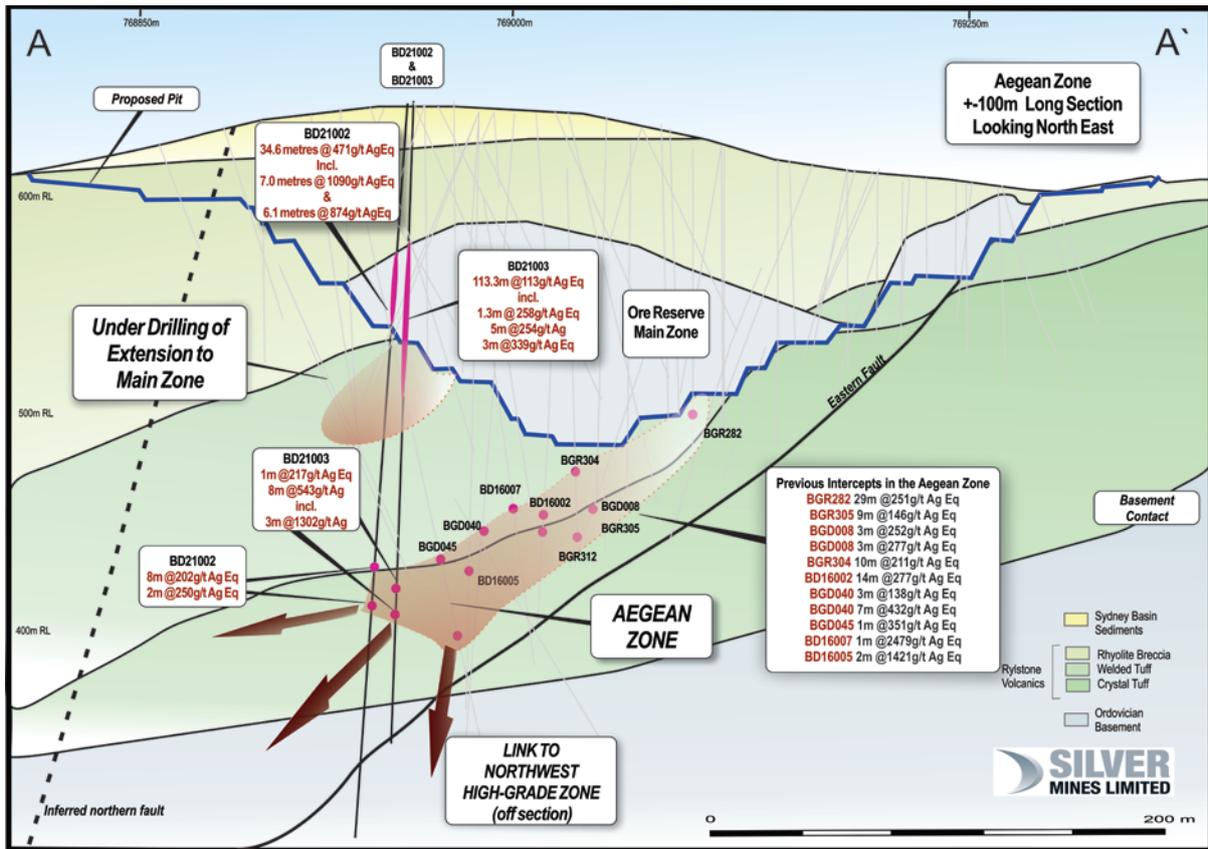


Figure 3: Section A-A' through Main Zone Ore Reserve and Aegean Zone showing new intercepts and previous intercepts.

Table 1. Intercept calculations from recent results from the Aegean Zone and Main Zone.

Zone	Hole	From	To	Interval	Silver	Zinc	Lead	Gold	Silver Eq
		(m)	(m)	(m)	(g/t)	(%)	(%)	(g/t)	(g/t) ¹
Main Zone	BD21002	96	131	35	410	0.39	1.13	-	467
	Incl.	97	104	7	966	0.56	2.86	-	1090
	& incl.	122	128.1	6.1	789	0.59	1.67	-	874
Aegean Zone		260	268	8	198	0.04	0.06	-	202
		295	297	2	245	-	0.16	-	250
		394	395	1	181	0.11	0.08	0.01	189
Main Zone	BD21003	60.7	174	113.3	90	0.29	0.29	-	113 ²
	Incl.	128	129	1	1300	0.93	2.1	-	1416
		171	174	3	304	0.38	0.47	-	339
Aegean Zone		294	295	1	215	0.02	0.03	-	217
		307	315	8	543	0.02	0.07	-	547
	Incl.	312	315	3	1302	0.01	0.12	-	1308
	& incl.	313	314	1	2850	0.02	0.35	-	2863

1. Bowdens' reported silver equivalent is consistent with previous reports and current resource modelling based on assumptions: Ag Eq (g/t) = Ag (g/t) + 33.48*Pb (%) + 49.61*Zn (%) calculated from prices of US\$20/oz silver, US\$1.50/lb zinc, US\$1.00/lb lead, and metallurgical recoveries of 85% silver + gold, 82% zinc and 83% lead estimated from test work commissioned by Silver Mines

Limited. 2. Silver equivalent updated to also include significant gold credit assuming the same recovery as silver, with gold:silver price ratio of 80:1 based on the approximate price ratio: $\text{Ag Eq (g/t)} = \text{Ag (g/t)} + 33.48 \cdot \text{Pb (\%)} + 49.61 \cdot \text{Zn (\%)} + 80 \cdot \text{Au (g/t)}$. Intercepts calculated using a 90g/t Ag cut-off and 3 metre internal dilution factor, with highest individual assay results highlighted as included within overall intercept.

2. Intercepts calculated using a 30g/t Ag cut-off and 10 metre maximum internal dilution factor, with highest individual assay results highlighted as included within overall intercept.

Previous intercepts which define the Aegean Zone back towards, and into the Ore Reserve include some very high-grade assays such as **1m @ 2479g/t Ag Eq** in BD16007, **2m @ 1421g/t Ag Eq** in BD16005, **7m @ 432g/t Ag Eq** in BGD040 and **10m @ 211g/t Ag Eq** in BGD304. Refer to Table 2 for a summary of previous intercepts which define the Aegean Zone.

Table 2: Historic intercepts from the Aegean Zone.

Hole	From	To	Interval	Silver	Zinc	Lead	Gold	Silver Eq
	(m)	(m)	(m)	(g/t)	(%)	(%)	(g/t)	(g/t) ¹
BD16002	226	240	14	267	0.01	0.29	-	277
BD16005	270	272	2	1401	0.08	0.47	-	1421
BD16007	235	236	1	2370	0.89	1.95	-	2479
BD21002	260	268	8	198	0.04	0.06	-	202
BGD008	216	219	3	170	0.81	1.23	-	252
BGD008	226	229	3	257	0.02	0.57	-	277
BGD040	230	233	3	135	0.04	0.03	-	138
BGD040	243	250	7	408	0.02	0.67	-	432
BGR282	141	170	29	226	0.16	0.48	-	251
BGR304	233	243	10	203	0.02	0.2	-	211
BD16001	241	242	1	340	0.06	0.54	-	361
BGD045	273	274	1	330	0.27	0.22	-	351

1. Bowdens' reported silver equivalent is consistent with previous reports and current resource modelling based on assumptions: $\text{Ag Eq (g/t)} = \text{Ag (g/t)} + 33.48 \cdot \text{Pb (\%)} + 49.61 \cdot \text{Zn (\%)}$ calculated from prices of US\$20/oz silver, US\$1.50/lb zinc, US\$1.00/lb lead, and metallurgical recoveries of 85% silver + gold, 82% zinc and 83% lead estimated from test work commissioned by Silver Mines Limited. 2. Silver equivalent updated to also include significant gold credit assuming the same recovery as silver, with gold:silver price ratio of 80:1 based on the approximate price ratio: $\text{Ag Eq (g/t)} = \text{Ag (g/t)} + 33.48 \cdot \text{Pb (\%)} + 49.61 \cdot \text{Zn (\%)} + 80 \cdot \text{Au (g/t)}$. Intercepts calculated using a 90g/t Ag cut-off and 3 metre internal dilution factor, with highest individual assay results highlighted as included within overall intercept.

Main Zone Results

Results from the very north of Main Zone, returned in BD21003, include **113.3m @ 113g/t Ag Eq from 60.7 metres to 174 metres** at a 30g/t silver equivalent cut off. This follows on from outstanding assays returned in BD21002 (refer release dated 19th February 2021) of **35m @ 467g/t Ag Eq from 96 metres, including 7.0m @ 1090g/t Ag Eq from 97 metres and 6.1m @ 874g/t Ag Eq from 122 metres**. These results, both at the northern limit of Main Zone, demonstrate that the near-surface mineralisation remains open immediately to the northwest of the current Ore Reserve, with the potential extend beyond the proposed pit design.

Further Exploration

Drilling continues to test other high-grade silver targets around the current resource and extensions with a focus on the Northwest High-Grade Zone and Aegean Zone. The base-metal and gold bearing Bundarra zone remain open to the south and down-dip to the west of previous drilling, with BD20001 drilled in early 2020 (refer release dated 8 April 2020) proving the Bowdens system is developed extensively at depth to the west.

About the Bowdens Silver Project

The Bowdens Silver Project is located in central New South Wales, approximately 26 kilometres east of Mudgee (refer to Figure 4). The consolidated project area comprises 2,007 km² (496,000 acres) of titles covering approximately 80 kilometres of strike of the highly mineralised Rylstone Volcanics. Multiple target styles and mineral occurrences have potential throughout the district including analogues to Bowdens Silver, high-grade silver-lead-zinc epithermal and volcanogenic massive sulphide (VMS) systems and copper-gold targets.

Bowdens Silver is the largest undeveloped silver deposit in Australia with substantial resources and a considerable body of high-quality technical work already completed. The projects boast outstanding logistics for future mine development.

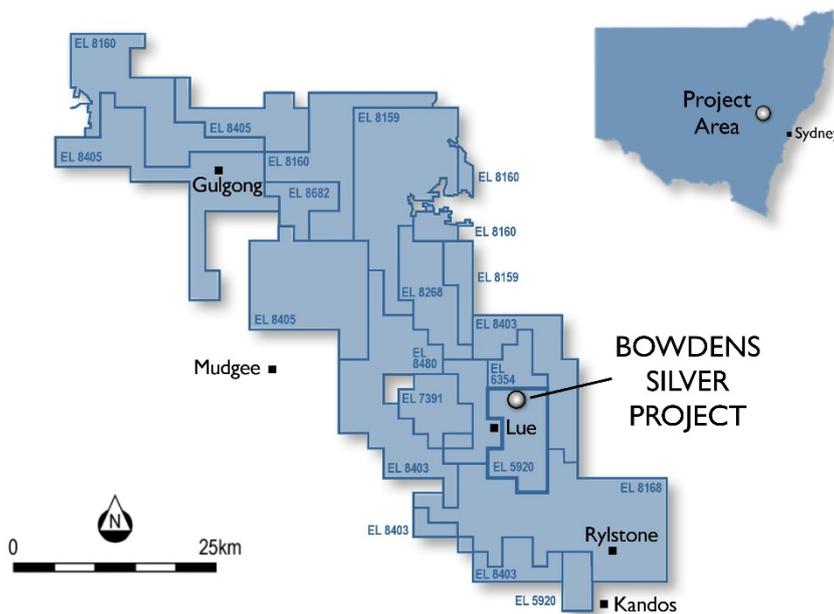


Figure 4: Silver Mines Limited tenement holdings in the Mudgee district.

This document has been authorised for release to the ASX by the Company’s Managing Director, Mr Anthony McClure.

Further information:

Anthony McClure
 Managing Director
 Silver Mines Limited
 +61 2 8316 3997

Luke Forrestal
 Associate Director
 M+C Partners
 +61 411 479 144

Competent Persons Statement

The information in this report that relates to mineral exploration from the Bowdens Silver Project is based on information compiled by the Bowdens Silver team and reviewed by Darren Holden who is an advisor to the Company. Dr Holden is a member of the Australasian Institute of Mining and Metallurgy and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the activity being undertaken, to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' (JORC code). Dr Holden consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

Table 3. Drill collar locations for new results.

Target	Hole ID	GDA94 East	GDA94 North	RL (m)	Dip	Azimuth (grid)	Depth (m)	Drill Type	Comment
Aegean Zone	BD21002	768951	6385818	656	-78	3	447.6	Core	Assays received
Aegean Zone	BD21003	768951	6385819	656	-75	21	405	Core	Assays received

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay.') In other cases, more explanation may be required such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Sampling taken continuously downhole from PQ and HQ diameter diamond core. PQ size core – all samples taken as nominal 1 or 2 metre intervals, or as otherwise defined by logged geology intervals, from quarter cut core. HQ size core – all samples taken as nominal 1 metre intervals where mineralisation observed from half cut core, or as composite 2 metre samples of quarter core, or as otherwise defined by logged geology intervals and from the same side of the core where downhole orientations permit. Samples vary in weight but are generally between 2 and 4 kilograms of material. Each sample was sent for multi-element assay using ICP technique (ME-ICP61) with the entire sample pulverized and homogenized with a 25g extract taken for assay. Select samples were also sent for gold using fire assay technique (Au-AA25 or Au-AA23) with a 30g sample taken for assay. Assays are considered representative of the sample collected.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Diamond drilling undertaken using PQ and HQ diamond core rig with triple tube used. All core, excluding PQ size, where unbroken ground allows, is oriented by drilling team and an orientation line drawn along the base of the hole.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. 	<ul style="list-style-type: none"> Core recovery is estimated at greater than 98%. Some zones, (less than 5%) were broken core with occasional clay zones where sample loss may have occurred. However, this is not considered to have materially affected the results.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • No significant relationship between sample recovery and grade exists.
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • All diamond core is logged using lithology, alteration, veining, mineralisation and structure, including geotechnical structure. • All core is photographed using both a wet and dry image. • In all cases the entire hole is logged by a geologist.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core were taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance, results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Selective sub-sampling based on geology to a maximum size of 2 metres and a minimum of 0.3 metres. • All core is cut using a Corewise core saw with core rotated 10 degrees to the orientation line to preserve the orientation for future reference. • For HQ core the half of the core without the orientation line is removed, bagged and sent to the laboratory for assay. • Sample sizes are considered appropriate for the rock type, style of mineralisation, the thickness and consistency of the intersections and assay ranges expected at Bowdens.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibration factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Samples dispatched to ALS Global in Orange NSW for sample preparation and analysis. Some sample batches were then on shipped to ALS Global in Adelaide, Brisbane and Townsville due to the high volume within the Orange Lab. • Site standards and blanks are inserted at a rate of 8 per 100 samples, and duplicates are inserted at a rate of 5 per 100 samples to check quality control. Laboratory standards and blanks are inserted every 25 samples.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • Significant intersections calculated by Bowdens Silver geologists. • All geological logging is entered digitally before inputting into a Maxwell Geoservices database schema. • Primary assay data is sent electronically from the laboratory to the SVL database administrator and then entered into the geological database for validation. • All assays matched with the logging sheets and loaded directly from the output provided by the laboratory with no manual entry of assays undertaken. • No adjustments were made or required to be made to the assay data.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • The collar position is initially surveyed using hand-held GPS with accuracy of +- 3 metres. • Down hole surveys collected every 30 metres using an electronic downhole reflex survey camera. • The terrain includes steep hills and ridges with a digital elevation model derived from a combination of locally flown LIDAR and publically available point cloud data. • All collars recorded in MGA94 zone 55.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • The drilling results relate to exploration drilling of the Aegean Zone. Drilling is not defined to a set spacing.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Drill orientation was designed to intersect the projection of the major structural controls to the Deposit. • An interpretation of the mineralisation has indicated that no sampling bias has been introduced.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • All samples bagged on site under the supervision the senior geologist with sample bags tied with cable ties before being driven by site personnel to the laboratory in Orange, NSW (~200 kilometres from

Criteria	JORC Code explanation	Commentary
		the site)
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> The drilling campaign and drill work includes on-going internal auditing with advice taken on process from external advisors.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Bowdens Resource is located wholly within Exploration Licence No 5920, held wholly by Silver Mines Limited and is located approximately 26 kilometres east of Mudgee, New South Wales. The tenement is in good standing. The project has a 2.0% Net Smelter Royalty which reduces to 1.0% after the payment of US\$5 million over 100% of EL5920 The project has a 0.85% Gross Royalty over 100% of EL5920.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The Bowdens project was previously managed by Kingsgate Consolidated and Silver Standard Ltd, however the new results under this table are based on work conducted solely by Silver Mines/Bowdens Silver.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Bowdens Deposit is a low sulphidation epithermal base-metal and silver system hosted in Permian aged Volcanic rocks. Mineralisation includes veins, shear veins and breccia zones within tuff and ignimbrite rocks. Mineralisation is overall shallowly dipping (~15 degrees to the north) with high-grade zones preferentially following a volcanic dome. There are several vein orientations within the broader mineralised zones including some areas of stock-work veins. The mineralisation reported in this release is hosted in the main Rylstone Volcanics which unconformably overlie the Ordovician Coomber Formation (sediments). The mineralization reported in this

Criteria	JORC Code explanation	Commentary
		report is related to Bowdens and represents a higher-temperature zone.
Drill hole Information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar; ○ elevation or RL (Reduced Level elevation above sea level in metres) of the drill hole collar; ○ dip and azimuth of the hole; ○ down hole length and interception depth; and ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • All information is included in Table 1 and Table 2 of this report above.
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • Intersection calculation are weighted to sample length. The average sample represents 1 metre of drill core. • Reported intersections are based on a cut off of 90g/t silver with a 3 metres internal dilution factor. • No top cutting of data or grades was undertaken in the reporting of these results.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	<ul style="list-style-type: none"> • Mineralisation is both stratabound and vein hosted. The stratigraphy dips moderately to the north within the volcanics and moderately to the west in the basement units, while the majority of mineralised veins dip west. Some individual veins intersected were sub-parallel (~10 to 20 degrees to core axes). However, given the stratigraphic controls on the zone, the drilling width is estimated to be 100 to 140% of true-width for stratabound mineralized zone.
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to, a plan view of 	<ul style="list-style-type: none"> • Maps and cross sections provided in the body of this report.

Criteria	JORC Code explanation	Commentary
	<i>drill hole collar locations and appropriate sectional views.</i>	
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All results received and compiled to date are reported in this release. Drilling is on-going with further results expected.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including but not limited to: geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics and potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> This report relates to drill data reported from this program.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> This report relates to a drill program that is designed to test the extension and explore for further zones of high-grade silver situated beneath the Bowdens Silver Deposit. Drilling is on-going with further results pending.